



USER MANUAL

4K 2x2 Video Wall Controller

Enjoy the vivid world

Introduction:

This 4K 2x2 video wall controller, support HDMI or DVI input and 4 HDMI output, the main function is to divide a complete HDMI, DVI HD image signal into 4 blocks and assign to 4 video display units (such as rear projection unit, LCD TV, etc.). Complete with 4 HDMI HD video display units to form a large dynamic image wall.



Features:

- * Support HDMI and DVI input;
- * Support 4 HDMI outputs;
- * Output support RGB 4:4:4;
- * Support RS232 control;
- * Support 2X2/1X2/2X1 splicing, easy operation, plug and play;
- * Support 2X2 automatic splicing function;
- * Support the highest input 4K/30Hz, the highest output of four each 1080P/60Hz;

Specifications:

HDMI resolution the highest support 4K/30Hz
Support audio format stereo
Input cable length ≤10M AWG26 HDMI standard cable
Output cable length ≤10M,AWG26 HDMI standard cable
Max working current 300mA
Power adapter specifications input AC (50HZ, 60HZ) 100V-240V Output 12V DC/1A
Operating temperature range (-10℃ ~ +45℃)
Dimension (L x W x H) 226x108x24(mm)
Weight 517g

Multiple splicing modes:



1x4



1x3



1x2



2x2




3x1



4x1

Product interface:

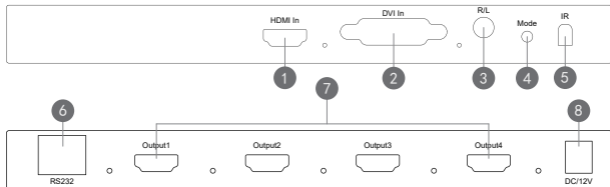

1: HDMI In --- HDMI input interfaces;

2: DVI In --- DVI input interface;

3: R/L --- 3.5mm audio output interface;

4: Mode --- Mode switching button;


5: IR --- Infrared reception;

6: RS232 --- RS232 interface;








7: Output1-4 --- HDMI output interfaces;

8: DC/12V --- Power supply;

Connection diagram:

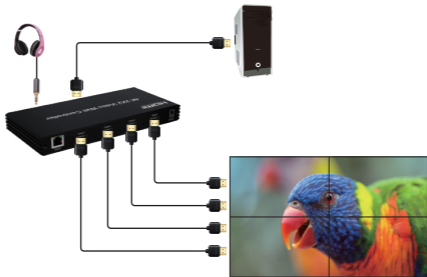

The instruction of remote control button:



Application scene



Outdoor video wall



Shopping mall video wall



Monitor room

Package include :

- 1: 2x2 video wall controller
- 2: Power adapter

1PC
1PC

3: Remote control
4: User manual

1PC
1PC